

General Information

If our pipes are shipped in pipe pallets in length of up to 11.8m, the pipes are packed in protection-foil and stuffed in wood –frame pallets.


4 pallets are stuffed in one 40' Container.

Container Unloading


Remove two pallets stored on plain ground in max storage the same time. Handle with care without pallet damage.

1. Fix wide non-metallic slings (e.g. nylon or polypropylene) after first wooden frame of the lower pallet at the bottom. Do not use chains, hooks or metallic slings.
2. Insert 20 mm steel pipe in container length on the bottom in the middle of the container between two lower pallets. (This is to ensure pallets will not hook together during pulling out.)
3. Pull pallets out of the container by heavy lift or crane until the first wood frame is free / out of the container.
4. Pull pallets again by lifting and pulling out of the container.
5. Stock pallets according our storage recommendations.
6. Remove steel pipe.
7. Remove next pallets the same way.

Longitudinal Section

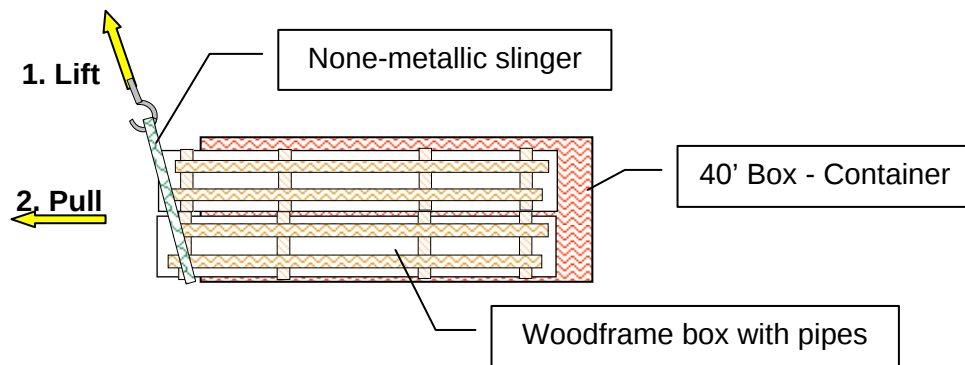

Front View

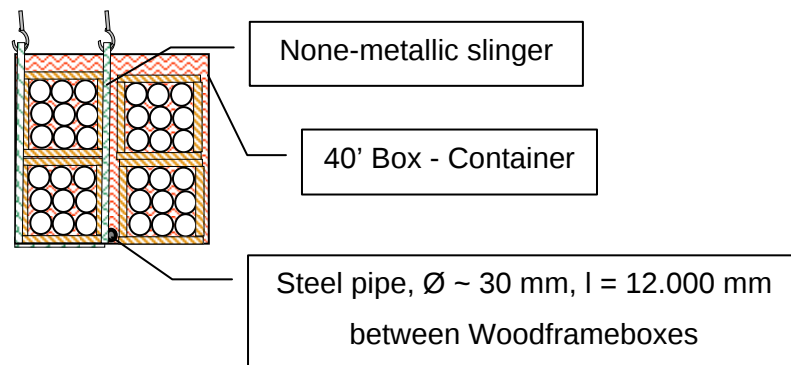

Cross Section Frame

